

Latest State Of The Art For Hydrodemolition

ACCESSORIES

HYDRODEMOLITION

Rotolance 400-II



0191


The Rotolance 400-II is a tool for cleaning and light preparation of concrete surfaces. The Rotolance will replace the standard lance-roller, in the power head, when cleaning and light surface preparation are required.

Data


Working diameter 360 mm (14.1")
Max. diameter 400 mm (15.7")
Max. water pressure 1000 bar (14.500 psi)
Max. water flow 240 l/min (63.4 gpm)
Revolution speed hydraulic 0-800 rpm
Max. hydraulic pressure 60 bar (870 psi)
Max. hydraulic flow 40 l/min (10.5 gpm)
HP hose connection M 36x2 DKO

The traverse and working width of the Rotolance is determined by the use of inductive sensors. Working width is pre-set by the operator.

All parameters for speed and movements are controlled from the control panel on the Aqua Cutter unit.

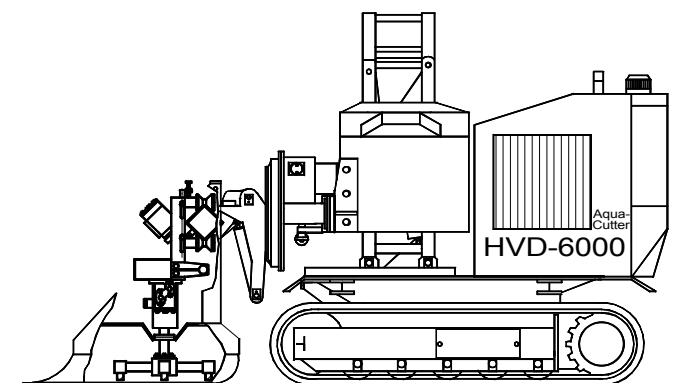

80176

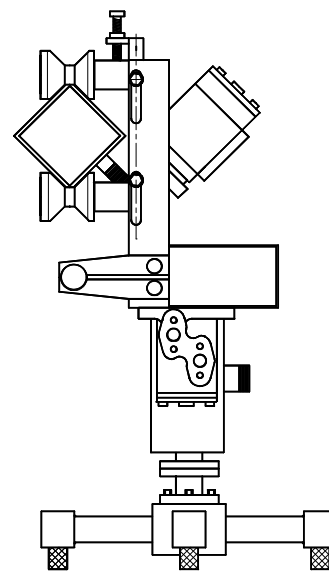

80182

AQUAJET
SYSTEMS AB
PROVEN HYDRODEMOLITION EQUIPMENT



B30
0007

A market leader serving the global Hydrodemolition Industry

Postadress/postal address
AQUAJET SYSTEMS AB
Brunnsvägen
SE-570 15 Holsbybrunn, Sweden

Telefon/Telephone
Nat 0383-50801
Int +46-383-50801

Telefax/Facsimile
Nat 0383-50730
Int +46-383-50730

VAT-ID-No
SE556314617301
Registered office
Vetlanda

E-mail
aquajet@aquajet.se
Internet
<http://www.aquajet.se>

Pictures are illustrative only and do not necessarily show configuration of products on the market at the given point in time. Product must be used in conformity with safe practice and applicable statutes, regulation codes and ordinances. Specifications of products and equipment shown herein are subject to change without notice. Subject to alteration without prior notice.