

Latest State Of The Art For Hydrodemolition

ACCESSORIES

HYDRODEMOLITION

Water Filter

FA 90 / FA 180 SE



120-21

FA 90 SE

Surface area filter bags 64 cm² (9,92 in²)
Maximum water flow 340 l/min (89,8 gpm)
Maximum pressure 10 bar, 107°C (145 psi, 224°F)



FA 180 SE

Surface area filter bags 134 cm² (20,77 in²)
Maximum water flow 680 l/min (179,6 gpm)
Maximum pressure 10 bar, 107°C
(145 psi, 224°F)

Protect your Power Pack from unnecessary wear when use of water with suspended particles, such as water from lakes or rivers, is required. Our bag filters will filter out micro and macro particles from the water before it enters the High Pressure system.

Placemen on the inlet water supply line outside the Power Pack allows for quick and easy access when it is time to replace the filter bags.

Clean water extends the lifetime on your pump, hose lines and nozzles.

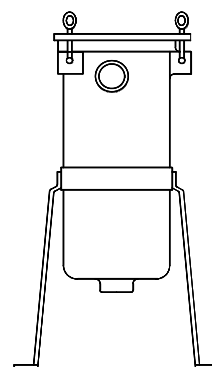

80009

A market leader serving the global Hydrodemolition Industry

AQUAJET
SYSTEMS AB
PROVEN HYDRODEMOLITION EQUIPMENT



B37

0008

Postadress/postal address

AQUAJET SYSTEMS AB
Brunnsvägen

SE-570 15 Holsbybrunn, Sweden

Telefon/Telephone

Nat 0383-50801
Int +46-383-50801

Telefax/Facsimile

Nat 0383-50730
Int +46-383-50730

VAT-ID-No

SE556314617301
Registered office

Vetlanda

E-mail

aquajet@aquajet.se
Internet

<http://www.aquajet.se>

Pictures are illustrative only and do not necessarily show configuration of products on the market at the given point in time. Product must be used in conformity with safe practice and applicable statutes, regulation codes and ordinances. Specifications of products and equipment shown herein are subject to change without notice. Subject to alteration without prior notice.